

# 329343D01 PLANTING - TREES

**Notes:**

1. Do not handle or move trees by their trunks. Lift and move by the ball.
2. Remove top 1/3 of wire cage and burlap from root ball. Do not include in backfill.
3. Remove all tree wrapping and tags prior to planting.
4. See specifications for further requirements related to this detail.

Trunk caliper shall meet ANSI Z60 current edition for root ball size.


Top of root ball modified as required to expose trunk flare. Prune all girdling and circling roots.

Round-topped soil berm 4" high x 8" wide above root ball surface shall be constructed around the root ball. Berm shall begin at root ball periphery.

Existing soil

Slope and loosen sides of planting hole.

Bottom of root ball rests on existing or recompacted soil.

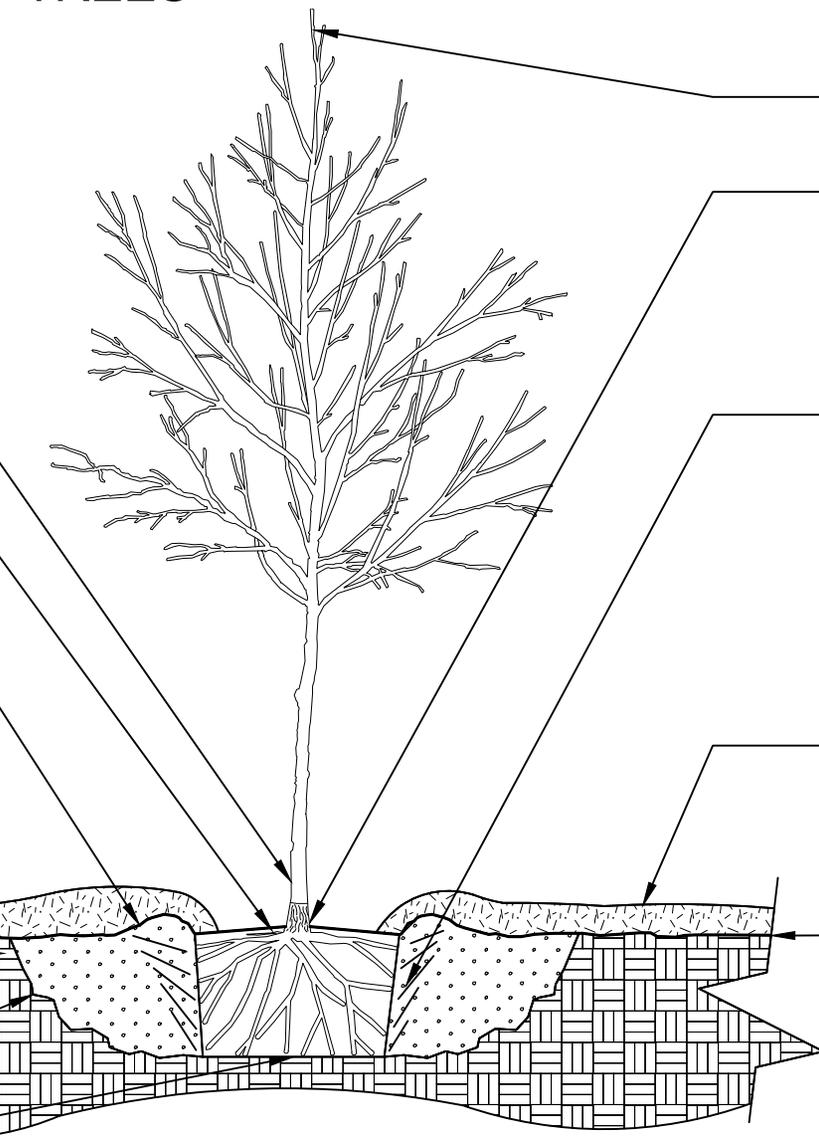

Central leader. (See crown observations detail).

Trunk flare shall be flush with - or no more than 2 inches below - finished grade. Graft line visible above grade (where applicable).

Backfill and lightly tamp soil around the root ball in 6" lifts to brace tree. When the planting hole has been backfilled half way, pour water around the root ball to settle the soil. Continue to fill and tamp in 6" lifts. When the planting hole is level with grade, water again,

4" layer of mulch over planting hole with minimum of 1" radius around trunk free of mulch. (See specifications for mulch).

Finished grade

Planting hole is 3x widest dimension of root ball  
**SECTION VIEW**

**D01**

## TREE PLANTING DETAIL (TYPICAL)

No Scale

Modified from: Urban Tree Foundation