


233816D03 FUME HOODS - EXHAUST DETAILS

TYPICAL INSTALLATION
SEE THE PERCHLORIC ACID NOTES STANDARD

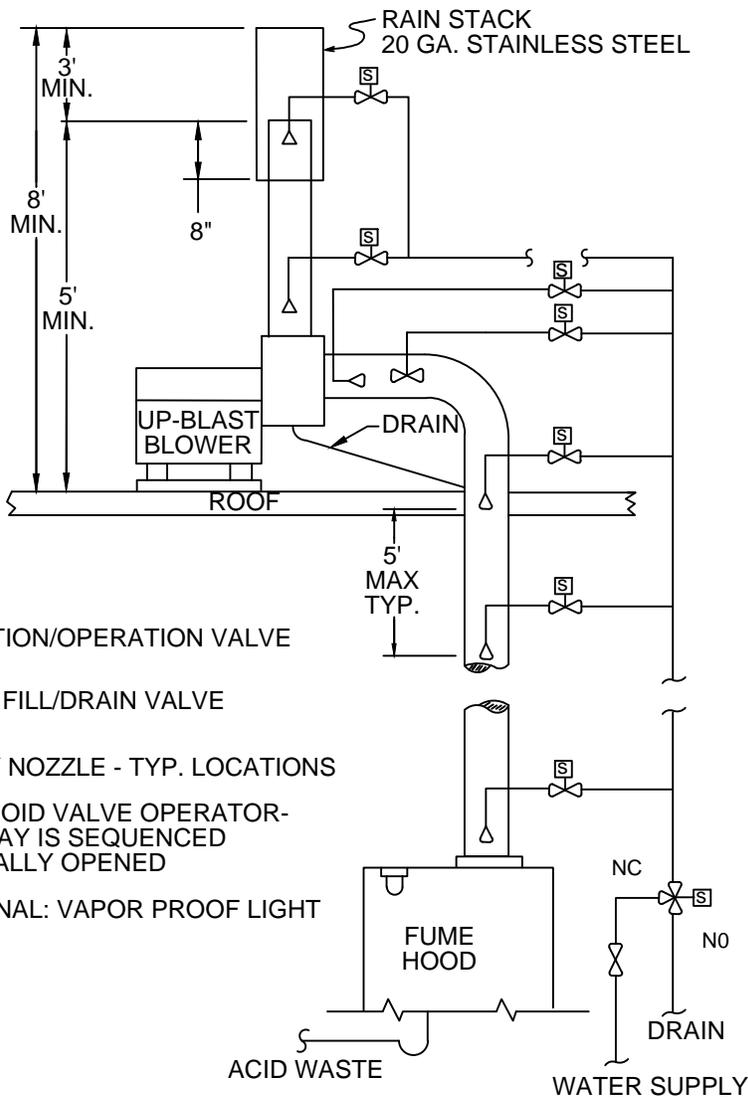

LEGEND

- ∞ ISOLATION/OPERATION VALVE
- ⋈ 3-WAY FILL/DRAIN VALVE
- Δ SPRAY NOZZLE - TYP. LOCATIONS
- S SOLENOID VALVE OPERATOR- IF SPRAY IS SEQUENCED NORMALLY OPENED
- ☐ OPTIONAL: VAPOR PROOF LIGHT



UNIVERSITY OF KENTUCKY DESIGN & CONSTRUCTION STANDARDS

DRAWN BY <u>MA</u> APP. BY _____ DATE <u>11/26/90</u>	REVISION DATE _____ _____ _____	TITLE : PERCHLORIC ACID FUME EXHAUST FUME	DRAWING NO. 233816D03
---	--	---	--------------------------