



# 224000D01 PLUMBING FIXTURES Lavatories

1. Fixtures are to be white vitreous china with front overflow.
2. Faucets on 4 inch centers, brass with a chrome finish and vandal proof handles. Provide 4 inch wrist handles for handicapped units or single lever (no ball) faucet.
3. Generally provide perforated grid drain. provide a pop - up drain in locker rooms, living quarters etc.
4. Listed dimensions are approximate.
5. Mount non - handicapped lavatories at 32 inches A.F.F. to the rim.
6. Caulk with silicon to seal joint and to have neat appearance.

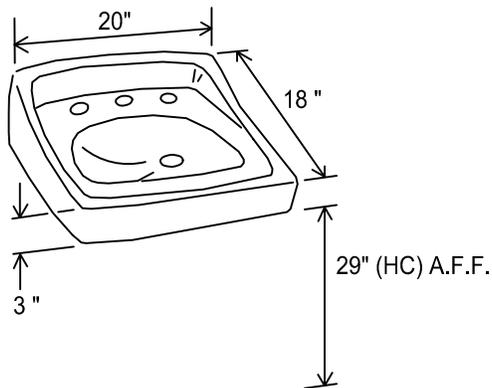

Wall Hung  
 - Internal back splash  
 - Concealed arms



Countertop  
 - Self rimming



## UNIVERSITY OF KENTUCKY DESIGN & CONSTRUCTION STANDARDS

DRAWN BY <u>GSB</u> APP. BY <u>MA</u> DATE <u>11/1/89</u>	REVISION DATE <table border="1"> <tr> <td>RLM</td> <td>11/26/90</td> </tr> <tr> <td> </td> <td> </td> </tr> </table>	RLM	11/26/90			TITLE : LAVATORIES	DRAWING NO.  <u>224000D01</u>
RLM	11/26/90						