

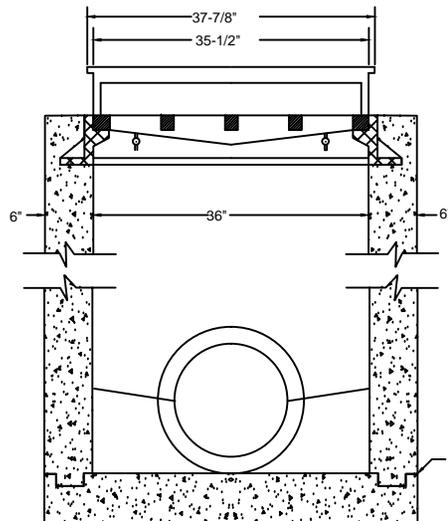



- NOTES:
1. CURB BOX ADJUSTABLE 6" TO 9" TO MATCH TOP OF CURB.
 2. NO. 5 STEEL SHALL BE USED THROUGHOUT ON 12" CENTERS
 3. ALL EXPOSED FLATWORK SHALL HAVE A HAND FLOATED AND BROOMED FINISH.
 4. NO STEEL IS REQUIRED IN BOTTOM SLAB
 5. ALL VERTICAL STEEL SHALL EXTEND 4" INTO BOTTOM SLAB.
 6. SET BACK FRAME IN CONCRETE TO ANCHOR IN PLACE AFTER IT HAS BEEN ADJUSTED.
 7. VANE GRATES REQUIRED UNLESS IN SAG CONDITION.

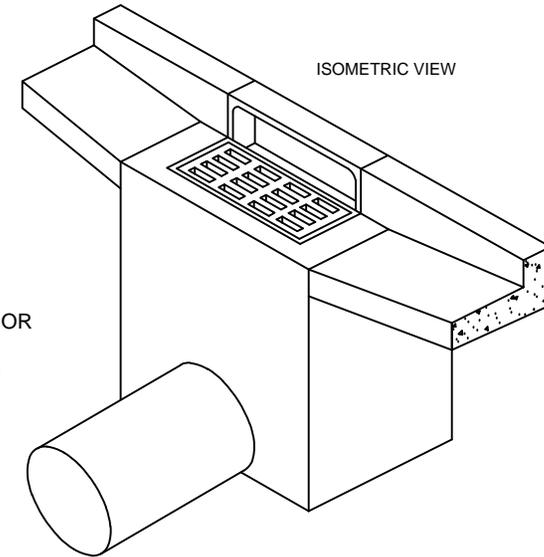



SECTION C-C

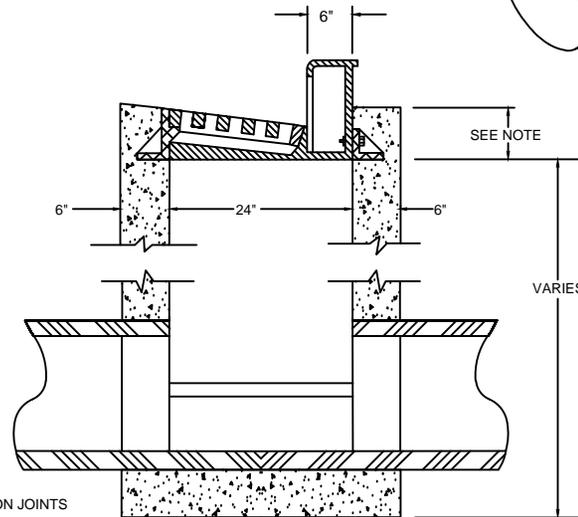

SECTION D-D

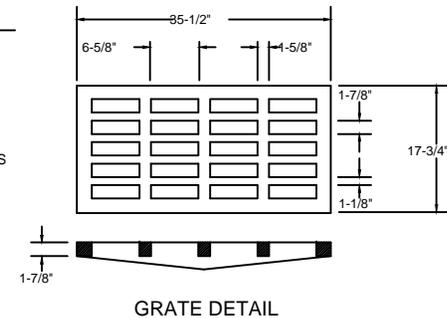

GRATE DETAIL



VANE GRATE DETAIL

033000D07 CAST-IN-PLACE CONCRETE - details
 Dated: 12/2015
 Applies to: All Projects
 University of Kentucky

DATE: 12/18/06	SOT
DWN BY:	
REV. DATE: 8/20/00	
REV. BY: CSB	

BLDG # 0000

CONCRETE SPECS
 CATCH BASIN DETAIL

PHYSICAL PLANT DIVISION

